

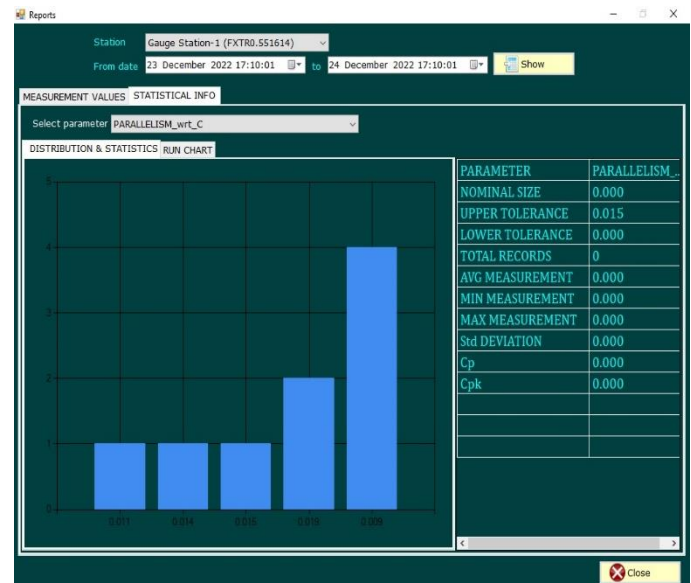
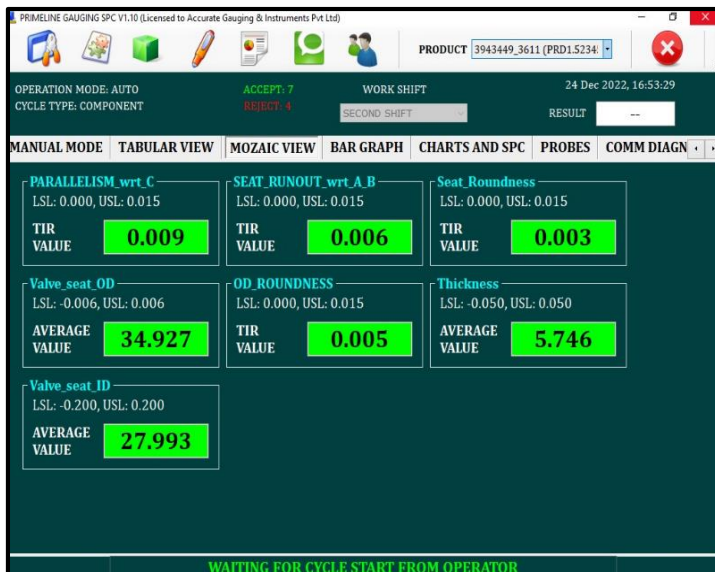
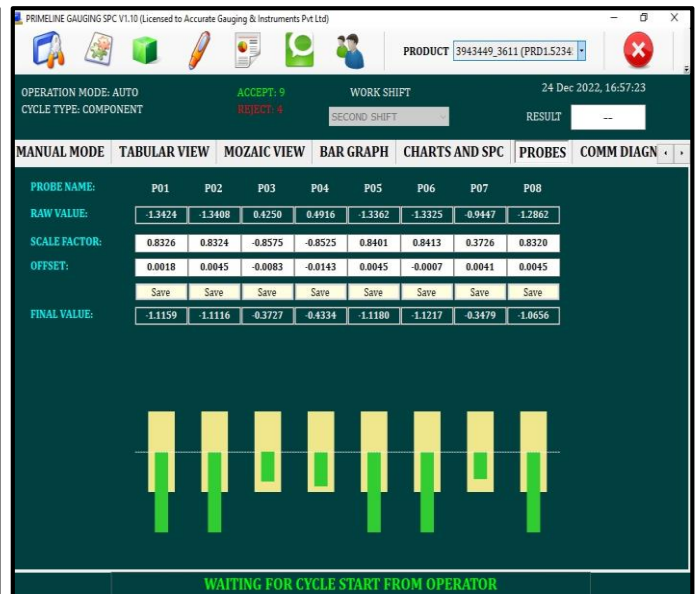



The **PrimeLine™** is a multigauging SPC software solution for gauging applications. The software supports unlimited product models to be configured and has all the parameter settings required for dimensional gauging. The gauge port provides measurement values to the **PrimeLine™** software. **PrimeLine™** software sends and receives data to PLC.

The **PrimeLine™** solution consists of main software, Gauge Port device. In addition to basic measurement features, the software has very elaborative reporting with SPC. Offline and online SPC helps user keep track of production, rejection while using the system. All the reports can be directly exported to .csv,.pdf file format with number of filtering options.

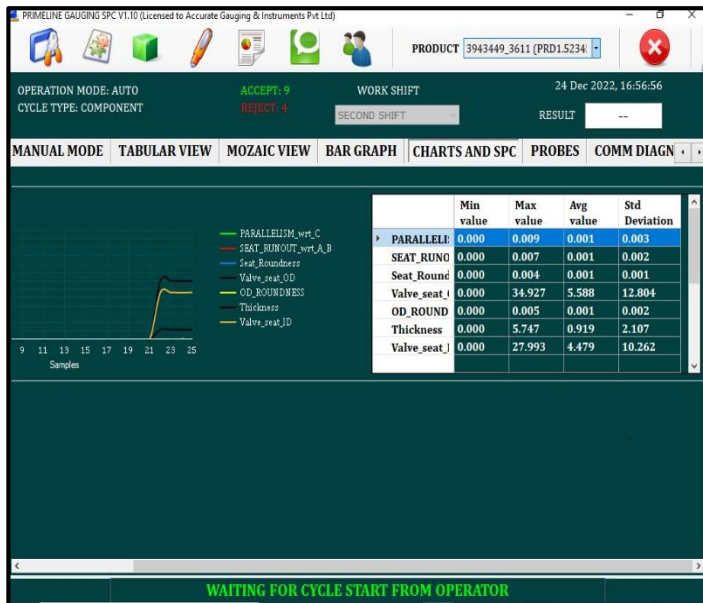

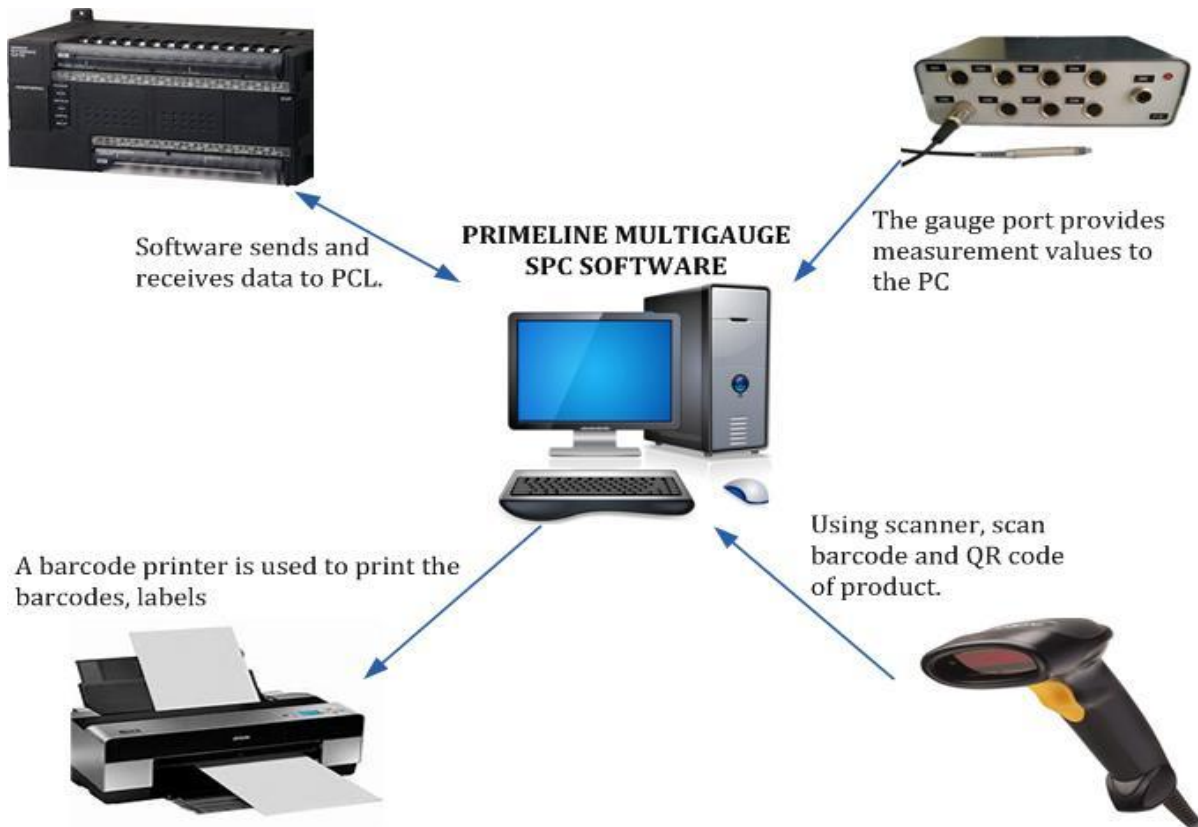

MARKING MACHINE




BIOMETRIC



TEMPERATURE SENSOR



CLOUD SERVER



KEY FEATURES OF PRIMELINE SOLUTION

- **PrimeLine™** ensures a friendly interface with clear layout, user-friendly messages and making operation easy for all users.
- Up to 10GB of measurement data can be stored in database of **PrimeLine™**.
- **Robust Data Backup Policy:** PrimeLine implements a robust data backup policy with regular intervals, including daily, weekly, monthly, and yearly selectable options. This ensures that users' data is consistently and securely stored, providing peace of mind and data reliability.
- **Easy Report Generation:** PrimeLine simplifies the process of creating reports through its user-friendly interface. Users can effortlessly generate comprehensive reports in both CSV and PDF formats, ensuring flexibility in data analysis and convenient sharing. This feature allows users to export reports in their preferred format (.csv for data manipulation and .pdf for easy sharing and viewing).
- **PrimeLine™** features collectively contribute to an efficient and streamlined monitoring process, optimizing workflows and maximizing data accuracy from product selection to parameter monitoring.
- **Serial number** reset on a daily, weekly, or monthly basis, or at a preset batch count.
- **Setable Shift timings.**
- Absolute/relative mode of display for measured dimension.
- The measure external/internal diameter.
- SPC Charts-X-Bar R-Chart, X-Bar S-Chart, Pie-chart, Run-chart.
- Grading option.
- Gauge configuration utility.
- Password Protection.
- Real-time data plotting.
- This product supports inductive type of gauges and binary gauge input in addition to air gauges, if suitable GaugePort device is used.
- This product supports temperature sensor, biometric, barcode printer, pin marking machine or laser marking machine to directly mark the tested component.
- Protects the computer in case of a power outage by automatically shutting down the system after preset timeout. (Requires **PowerMon™** device and a UPS to be connected separately).
- Software can help optimize production processes, reducing lead times.

ACCESSORIES

PrimeLine

Sr.no	Accessories
1	Haley GaugePort /Aero GaugePort
2	Biometric
3	Scanner
4	Serial cable
5	Temperature Sensor